



AC Service Station

Instructions for use









Contents

1. Symbols use	1
2. Important notes	1
2.1. User group	1
2.2. Agreement	1
2.4. Obligation of contractor	2
2.5. Safety regulations	2
2.6. Technical Data	4
3. Product description	5
3.1. Application	5
3.2. Scope of delivery	5
4. Description of unit	6
5. Input Selection	7
5.1. Display screen	7
5.2. Main Menu Options	7
5.3. Quick couplers	7
5.4. Power supply cable and switch	8
5.5. Functional description	8
6. Unpacking	9
7. Commissioning	10
7.1. Connections and positioning	10
7.2. Refill the work tank	10
8. A/C system service	11
8.1. Recovery process	11
8.2. Vacuum process	13
8.3. Charge process	14
9. Maintenance	16
9.1. Load Cell Calibrate	16
9.2. Insufficient refrigerant in work tank	18
9.3. Vacuum pump oil change	18
9.4. Change Filter	20

1. Symbols use

1.1. Symbols in this documentation

Symbol	Designation	Explanation
	Attention	Warns about possible property damage
	Information	Practical hints and other useful information.
	Multi-step operation	Instruction consisting of several steps.
	One-step operation	Instruction consisting of one step.
	Intermediate result	An instruction produces a visible intermediate result
	Final result	There is a visible final result on completion of the instruction.

2. Important notes



Before start up, connecting and operating the products. It is absolutely essential that the Original instructions / owner's manual and in particular, the manual are studied carefully. By doing so you can eliminate any uncertainties in handling the products and thus associated safety risks upfront; something which is in the interests of your own safety and will ultimately help avoid damage to the device. When a product is handed over to another person, not only the Original instructions but also the safety instructions and information on its designated use must be handed over to the person.

1

2.1. User group

The product may be used by skilled and instructed personnel only. Personnel scheduled to be trained, familiarized, and instructed or to take part in a general training course may only work with the product under the supervision of an experienced person. All work conducted on pressurized equipment may be performed by persons with sufficient knowledge and experience in the field of refrigeration, cooling systems and coolants and, also be aware of the risks involved in the use of pressurized devices.

2.2. Agreement

By using the product you agree to the following regulations:

Copyright

Software and data are the property of CTX.01.0001 or its suppliers and protected against copying by copyright laws, international agreements and other national legal regulations. Copying or selling of data and software or any part there of is impermissible and punishable; in the event of any infringements CTX.01.0001 reserves the right to proceed with criminal prosecution and to claim for damages.

Warranty

Any use of non-approved hardware and software will result in a modification to our product and thus to exclusion of any liability and warranty, even if the hardware or software has in the meantime been removed or deleted.

No changes may be made to our products. Our products may only be used in combination with original accessories and original service parts. Failing to do so, will render null and void all warranty claims.

This product may only be operated using approved operating systems. If the product is operated using an operating system other than the approved one, then our warranty obligation pursuant to our supply conditions will be rendered null and void. Furthermore, we will not be held liable for damage and consequential damage incurred through the use of a non-approved operating system.

2.3. Obligation of contractor

The contractor is obliged to ensure that all measures geared towards the prevention of accidents, industrial diseases, labor- related health risks are taken and measures towards making the workplace fit for people to work in are carried out.

Basic rules

The contractor is bound to ensure that all electrical equipment and operating material is set up, modified and maintained by skilled electricians only or under the guidance and supervision of a skilled electrician in accordance with electrical engineering principles.

Furthermore, the contractor must ensure that all electrical equipment and operating material is operated in keeping with electrical engineering principles.

If a piece of electrical equipment or operating material is found to be defective, i.e. It does not or no longer complies with electrical engineering principles, the contractor must ensure that the fault is rectified immediately and, in the event that imminent danger exists, also ensure that the electrical equipment or the electrical operating material is not use

2.4. Safety regulations

Always carefully study and follow all the safety regulations before using the product.



Avoid all skin contact with the refrigerant. The low boiling point of the Ref. (approx. -30° C) can lead to frostbite. Should refrigerant come into contact with the skin, remove any moistened clothing immediately and rinse the area of skin affected with generous amounts of water.

- Avoid all skin contact with the UV dye. Should UV dye come into contact with the skin, remove moistened clothing immediately and rinse the area affected with generous amounts of water.
- R134a is colorless, with weak characteristic smell and heavier than air. It may flow into repair pits. Should refrigerant escape, Provide for sufficient ventilation (particularly in repair pits) and leave the workshop.



Never inhale refrigerant, dye and oil vapors. The vapors can irritate the eyes, nose and respiratory system. If liquid refrigerant or UV dye comes into contact with the eyes, rinse them thoroughly with water for 15 minutes. Then obtain medical attention even if no pain is felt.

- Never swallow UV dye. Should it be swallowed inadvertently, never attempt to induce vomiting. Drink generous amounts of water and obtain medical attention.
- Before connecting the CTX.01.0001 to a vehicle air conditioning system or an external refrigerant bottle, make sure the quick- release couplings are not leaking. Only ever use external refrigerant bottles provided with safety valves and certified in line with applicable standards.
- Before switching off the CTX.01.0001, make sure all charging and drainage operations have been completed. This prevents damage to the unit and reduces the risk of refrigerant escaping into the environment.



Never use compressed air with R134a. Certain mixtures of air and R134a are highly flammable. Such mixtures are a potential hazard and may lead to fire or explosions and thus cause damage or injury.

- Refrigerant extracted from a vehicle air conditioning system maybe contaminated with moisture, lubricant, dirt and traces of other gases.
- If the refrigerant has been contaminated by being mixed with other gases, remove the contaminated refrigerant and add fresh R134a before using the machine for A/C service.
- R134a is not to be used in areas in which there is a danger of explosion. Fire, open flames and smoking are prohibited.
- The CTX.01.0001 unit should not be exposed to excess moisture or be operated in wet areas. R134a is not to be mixed with other refrigerants. The mixing of refrigerants could damage the vehicle air conditioning system.
- De-energizing is only to be performed by a qualified electrician, a qualified electrician for specific tasks (hybrid) or a power systems engineer.



If high-voltage components or high-voltage wires are handled incorrectly, there is a risk of fatal injury from high voltage and the possible transmission of current through the body.

- Work on vehicles with high-voltage components is only ever to be performed in a safe de-energized condition by persons with the minimum qualification "Trained to perform electrical work" .
- Even after deactivating a high-voltage vehicle electrical system, the high-voltage battery may still be live.
- Operating condition cannot be established from any running noise, as the electric machine is silent when stationary.
- The CTX.01.0001 must be constantly monitored when in operation.
- Position the CTX.01.0001 on all four wheels on a flat, vibration- proof surface so that proper operation of the scales is guaranteed
- The CTX.01.0001 must always be transported in its operating position. Never lay down the CTX.01.0001, as oil could then escape from the vacuum pump or the built in compressor could be damaged. There are no additional safety systems for protecting the CTX.01.0001 against damage resulting from natural catastrophes.
- The CTX.01.0001 must be subjected to regular maintenance to ensure the safety of the unit.
- Disconnect power before performing any maintenance or service to unit.
- Never perform any maintenance work which is not expressly recommended in this manual. Contact customer service if components have to be replaced other than in the course of maintenance work.
- If there is damage to the CTX.01.0001, terminate usage immediately and contact customer service.
- The service hoses and service quick-release couplings must be regularly checked for wear and replaced if damaged.
- Never remove any components from inside the CTX.01.0001 except for maintenance or repair purposes.
- Be sure that the high and low manual valve is closed before connecting the device to the air conditioner. Don't put the hose near rotation or heating automobile parts such as electronic fan or radiator.
- Check the vacuum pump oil level before use.
- Keep away from children and people of insufficient mental development when running.
- There must be more than 1Kg refrigerant inside the cylinder, otherwise machine doesn't work.
- Close the high and low manual valve after each time of using this device.

2.5. Technical Data

Description	Specification
Work Tank Capacity	18KGS
Service pressure	18 Bar
Method to Weigh Gas Content	Load Cell
Recovered Oil Container	340ml
Vacuum Pump	120L/min
Compressor Capacity	3/8 HP
Dryer Filter Ability	80KGS
Display	3.2 inch LCD
Software updating	USB
All Functions	Manual
Packing Dimension (H x W x D)	1140*625*580 mm
Net weight	67 KGS
Gross weight	80KGS
Power supply frequency	220V/50HZ
Voltage	220VAC
Recovery efficiency	>80%
Charging Accuracy	± 10g
Lifetime of pump oil	600min

- **Recovery phase:** The refrigerant is extracted from the vehicle air conditioning system, cleaned and routed into the internal bottle of the CTX.01.0001. The refrigerant oil collected in the process is drained into the used oil bottle at the CTX.01.0001.
- **Vacuum phase:** A vacuum is generated in the vehicle air conditioning system. Measurement of the drop in pressure begins as soon as the vacuum has been generated.
- **Charging phase:** A certain quantity of refrigerant is added to the vehicle air conditioning system.


3. Product description

3.1. Application

CTX.01.0001 is suitable for vehicles with a conventional engine vehicles. It features the basic functions required for vehicle A/C service.

The following functions can be implemented:


- Refrigerant recovery and recharging.
- Vacuum generation.

 CTX.01.0001 can only be operated with R134a. It is not to be used for service work on vehicles with air conditioning systems employing refrigerants other than R134a, as this will cause damage. Prior to A/C service check the type of refrigerant used in the vehicle air conditioning system.


3.2. Scope of delivery

Description
Service hose (high pressure)
Service hose (low pressure)
Quick-release coupling (high pressure)
Quick-release coupling (low pressure)
Oil bottles

4. Description of unit

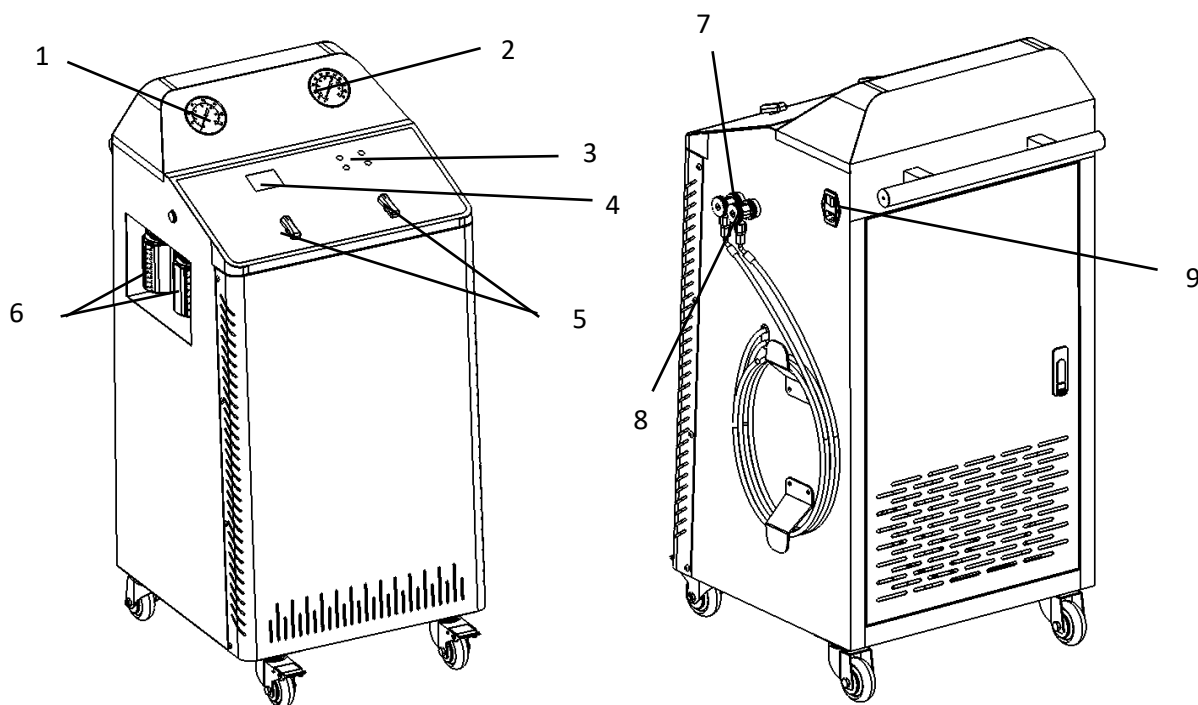

6

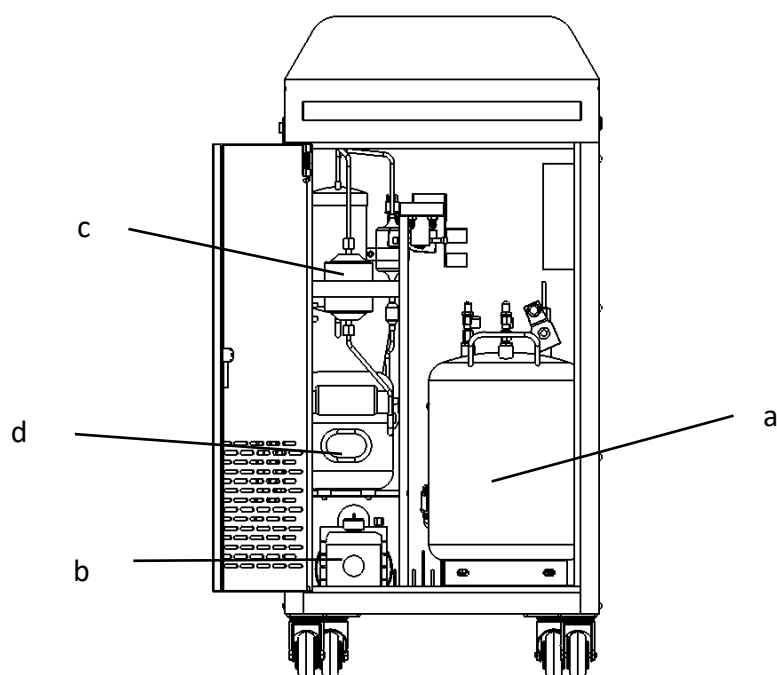

- 1 HP Gauge
- 2 LP Gauge
- 3 Keypad
- 4 2.8" LCD Screen
- 5 Valves (Blue for LP, Red for HP)
- 6 Oil bottles (Blue for new oil, Red for drained oil)
- 7 LP Quick Coupler
- 8 HP Quick Coupler
- 9 Power Switch

- a Work Tank
- b Vacuum Pump
- c Dry Filter

5. Input Selection

5.1. Display screen

The main interface is as below.



Main Menu

An Operation can be selected by using the keypad, press ENTER to choose which type of process is desired.

- To select a function in the menu, use the keypad to choose.
- Do not use a sharp, pointed object on the touch screen. Damage may occur!
- Although the LCD touch screen is glass, do not use harsh chemicals to clean the surface. Standard glass cleaner is recommended

7

5.2. Main Menu Options

User can select the following functions:

- Recovery
- Vacuum
- Charge
- Maintenance

Each of the menu options will be described in detail later in the manual.

5.3. Quick couplers


Quick coupler is the intelligent coupler that with the suitable procedure in the software enables to:

- Reduce the amount of non-condensing gases formed inside the work tank;
- Avoid the refrigerant (loss) dispersion in the air during the disconnection of the couplers (Puff-effect);
- Check possible valve leaks before disconnection;



Quick Couplers

To connect the couplers, position the couplers on the vehicle couplers, pull back the knurled section of the coupling element and press carefully onto the connection.

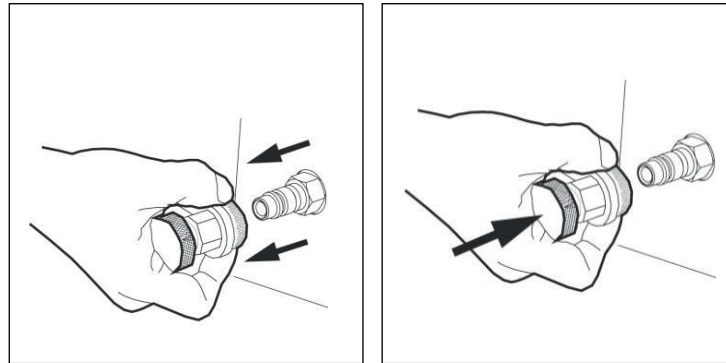

The service quick-release couplings are connected to the service connections of the vehicle air conditioning system during A/C service. When not in use, the service quick-release couplers can be connected to the machine.

To remove the service quick-release couplings from the vehicle, press the couplers slightly towards the connection and carefully pull the knurled section back to unfasten it from the couplers.

5.4. Power supply cable and switch

The power supply cable is connected to the main power input. When not in operation, the power supply cable can be disconnected and hung on the handle. The CTX.01.0001 is switched on by toggling the rocker switch to the on position.

5.5. Functional description

The refrigerant recovered from the air conditioning system pass through the combo filter to remove suspended particles and moisture.

The purpose of the vacuum pump is to generate a vacuum in the air conditioning system which removes excess moisture and to detect possible leaks in the vehicle air conditioning system.

Used oil is separated from the recovered vehicle refrigerant and drained into the used oil bottle.

The vehicle air conditioning system is partly filled with UV dye to facilitate the detection of leaks in the event of damage to the vehicle air conditioning system.

The refrigerant in the internal refrigerant bottle is used for filling the vehicle air conditioning system .

The purging unit for the non-condensing gases, consisting of a temperature sensor, pressure sensor, coil and orifice always takes effect when the internal refrigerant bottle pressure is higher than the saturation pressure.

6. Unpacking



Warning – Risk of personal injury!





Incorrect handling could cause equipment to overturn.




The manufacturer disclaims all responsibility for damage to objects and/or persons resulting from the equipment being wrongly removed from the pallet, or if the operation is performed by unsuitable personnel, with improper means protections and without complying with the existing laws on manual handling of loads and with the operations described in this manual.

- Remove staples and remove the carton

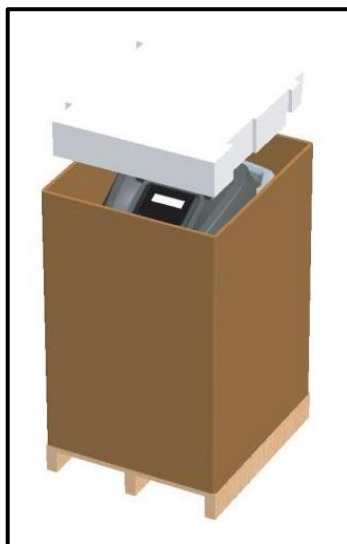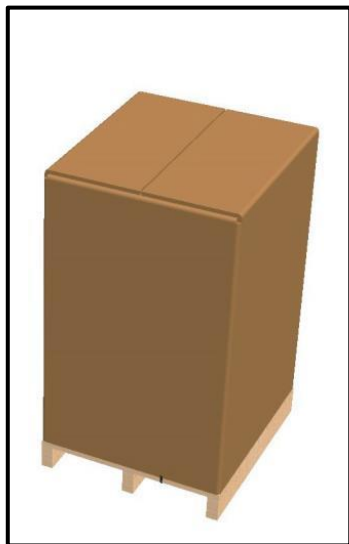

- Cut straps securing unit to pallet.
- With 2 people, lift both front wheels by levering with the handle so unit is setting on the rear wheels.
- Slowly lower the unit from pallet by means of the rear wheels.
- Keep the pallet, carton, and scratch protection film for use in case of a need to return unit.

7. Commissioning


 All the operations described in Section 7 must be performed prior to first A/C service

7.1. Connections and positioning


The CTX.01.0001 is designed for 220V, 50/60Hz.


Follow the information on the CTX.01.0001 rating plate.


- ① Set the machine on a flat, vibration proof surface.
- ② Actuate the caster brake to stop the machine from rolling.
- ③ Connect the power supply cable to the power supply.
- ④ Switch on the main switch.


 The unit must be positioned on a stable, horizontal surface to ensure correct operation. Unit must be in an area with proper ventilation and at least 10cm from any potential obstacle to its internal ventilation.


 Keep unit out of rain and excessive humidity as moisture could cause irreparable damage.

 Prevent exposure to direct sunlight and excessive dust.

 Unit must be properly grounded with the power plug ground pin. Failure to ground unit can cause damage and constitutes a risk of fatal injury or shock to the operator.

 Do not unplug any internal electrical connections and only have internal components opened and repaired by trained customer service personnel.

 Contact customer service in the event of any transportation damage (e.g. oil leakage).

 Leave quick couplers closed when unit is not in use and at end of vehicle service operations.

7.2. Refill the work tank

Warning - Risk of frostbite from escaping refrigerant



- Refrigerant causes frostbite on the skin
- Check the service hoses for damage
 - Firmly connect the service quick- release couplings to the service hoses.
 - Wear protective goggles.
 - Wear protective gloves.
-

Before the machine can be used, the internal refrigerant cylinder must be filled with liquid refrigerant. Use only R134a refrigerant.

To ensure a reliable procedure, it is advisable to use the optimum quantity of refrigerant. The optimum quantity of refrigerant for the machine is 3.0kg – 6.0kg.

An inadequate quantity of refrigerant may make effectiveness of filling the vehicle air conditioning system impossible. Also, if there is an insufficient quantity, the machine may not be able to operate efficiently. In the event of an excessive quantity, there may not be space for the refrigerant recovered from the vehicle air conditioning system.

Execute the following actions in sequential order by following the procedure as shown on the display:

1. Set the internal cylinder fill to desired quantity (min. 3kg).
2. Connect the red hose to the source tank, ensure the valve of the source tank had been closed.
3. Vacuuming the hose...
4. Open the source tank valve, place the source tank up side down.
5. Tank Refilling reaches the preset amount. Please close the source tank valve, press Enter to recover the refrigerant in the hose.


8. A/C system service

8.1. Recovery process


1. From the Main Menu, select RECOVERY.




2. Choose "Enter" to start recovering. Choose "Exit" to return the Main Menu.

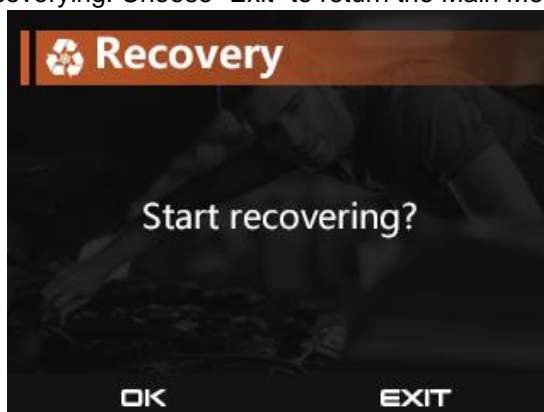

3. Recovery is in progress. The recovered weight will be displayed after the recovery process is completed.

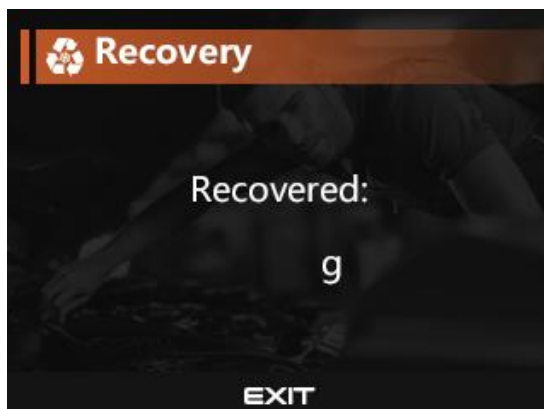

4. Recovery Completed.

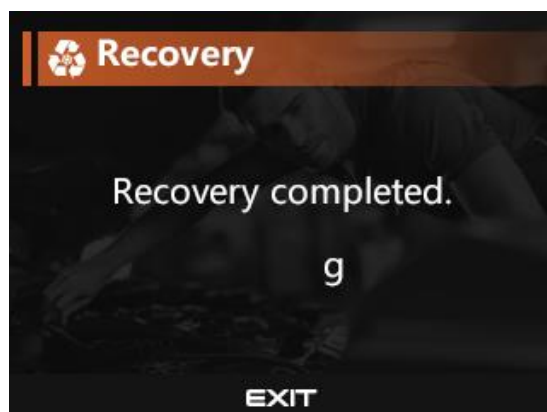

There is potential for unit to display an error because of the high internal pressure.




8.2. Vacuum process

1. From the main menu, select VACUUM.



2. Set the Vacuum time, and press "Enter" to begin vacuum process.

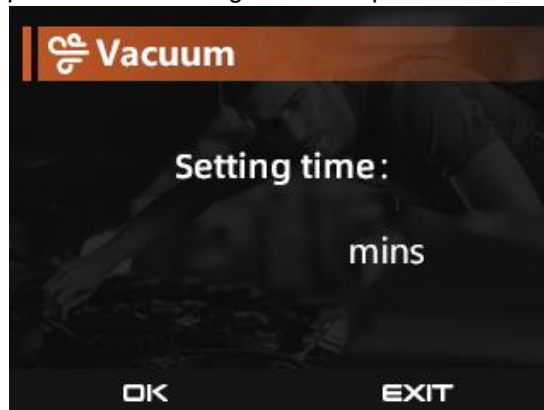

3. Vacuum completed. Press "Exit" to return the Main Menu.




8.3. Charge process


1. From the main menu, select CHARGE.




2. Set the Charge amount, and press "Start" to begin charge process.

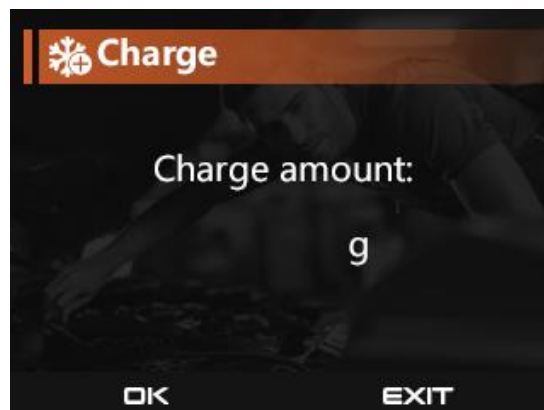


3. Charge is in progress. The charged weight will be displayed after the charge process is completed.

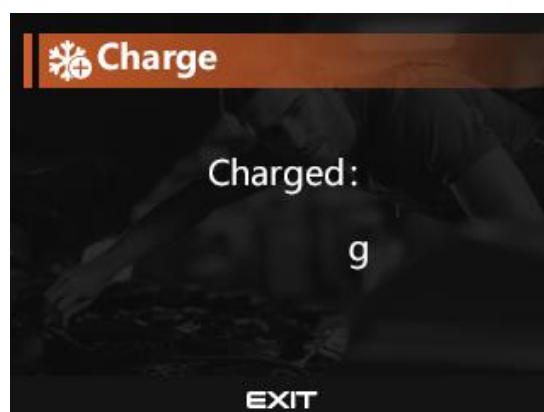

4. Charge Completed.

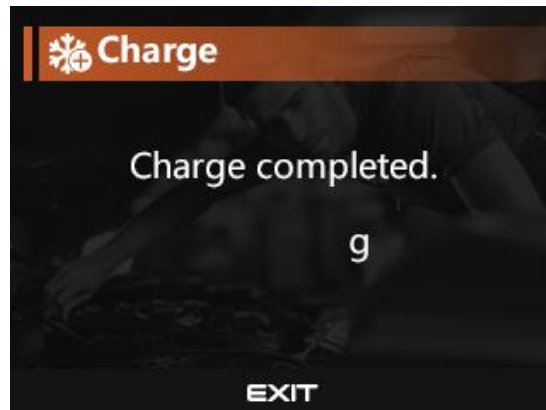

There is potential for unit to display an error of the slow charging. Please close the high side valve and turn on A/C.

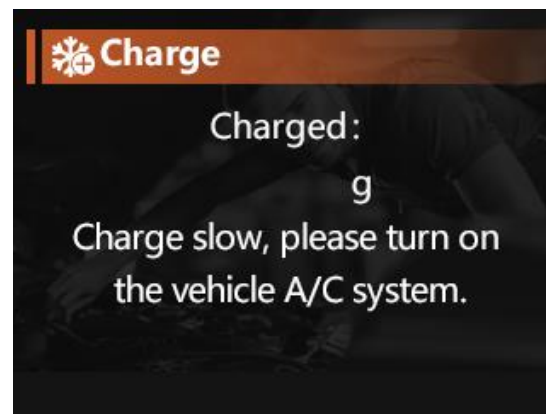

15


9. Maintenance

Make sure the machine is disconnected from power before removing plastic housing.

Never perform any maintenance work which is not expressly recommended in this Section.

Contact customer service if components have to be replaced other than in the course of maintenance work. And please contact an authorized technical service center for purchasing factory replacement parts.


To access MAINTENANCE from the MAIN MENU, press “Enter” to the next.

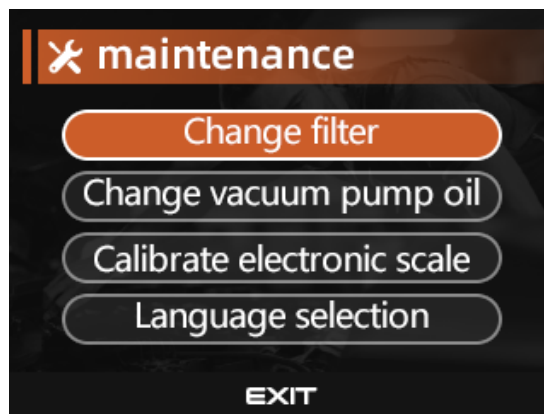

16

9.1. Load Cell Calibrate

- a. Enter the password.

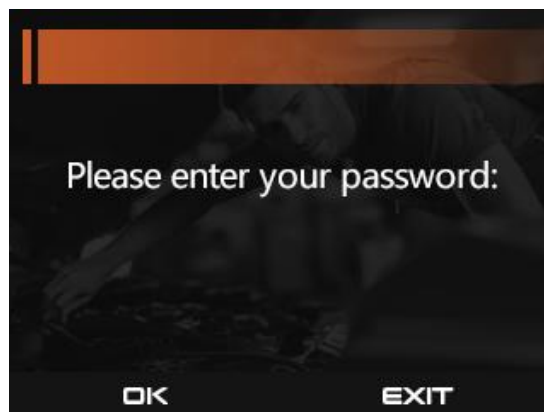

b. Select the mode of Load Cell Calibration, Weight calibration or Automatic calibration.




c. If you select the Automatic calibration, it will do the calibration automatically. If you have choose the Weight calibration, please remove the tank. Press "ENTER" to the next step.


17



d. Place a 10KG weights on the scale and press ENTER to do the calibrate.

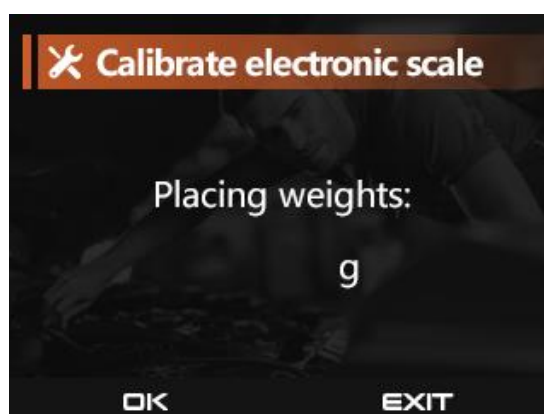

e. Calibrate complete. Press “Exit” to return the Main Interface.

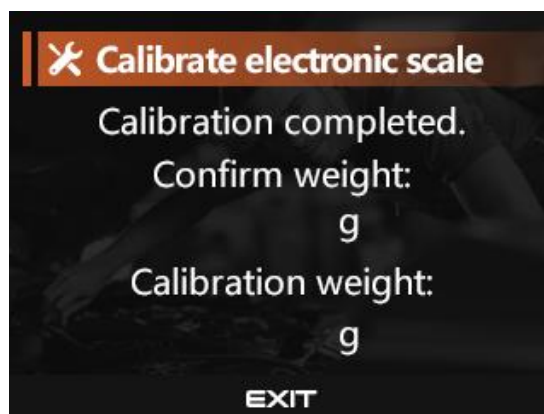

9.2. Insufficient refrigerant in work tank

To ensure a reliable procedure, it is advisable to use the optimum quantity of refrigerant. The optimum quantity of refrigerant for the machine is 4kg – 10.0kg.


18

An inadequate quantity of refrigerant may make effectiveness of filling the vehicle air conditioning system impossible. If there is insufficient refrigerant in work tank, please Refer to 7.2 Refill the work tank.


9.3. Vacuum pump oil change

When the oil level is reach the minimum position, pump oil should be added. System could accumulate the vacuum time. When the value reach to 600 hours, system would prompt changing the pump oil.

1. To begin the vacuum pump oil replacement process, from the Main Menu, choose Change vacuum pump oil.

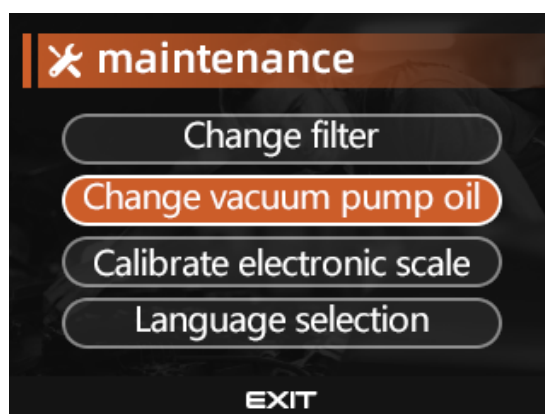


Using a flat head screwdriver, rotate the front locking screw and lift the front housing. Place a bowl under the vacuum pump oil drain hole. Remove the upper filling plug and the lower drain plug to allow the oil to drain from unit. Once the pump has been emptied, reinstall the lower drain plug. Fill the pump with new oil through the upper fill port using a funnel if needed.

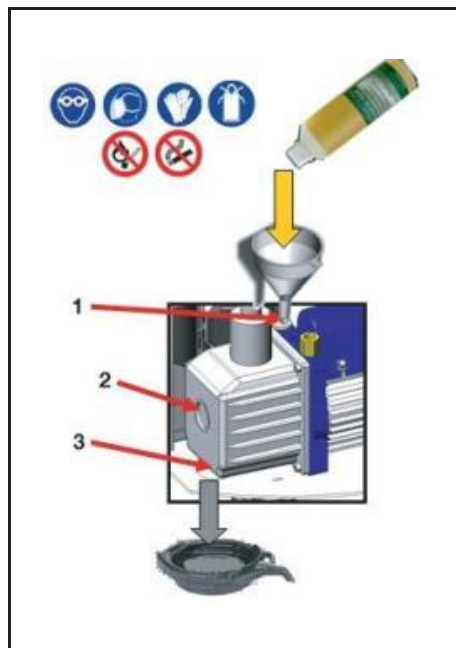

Changing vacuum pump oil

- 1 Oil filling plug
- 2 Oil inspection window
- 3 Lower drain plug


2. Replace Vacuum Pump Oil Complete. The machine will automatically update the vacuum oil capacity.

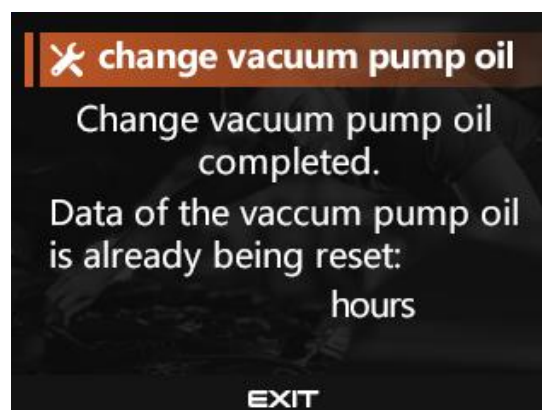

9.4. Change Filter

System could accumulate the recovering refrigerant weight. When the value reach to 100Kg, system would prompt changing the filter.

1. To begin the filter replacement process, from the Main Menu, choose Change Filter.

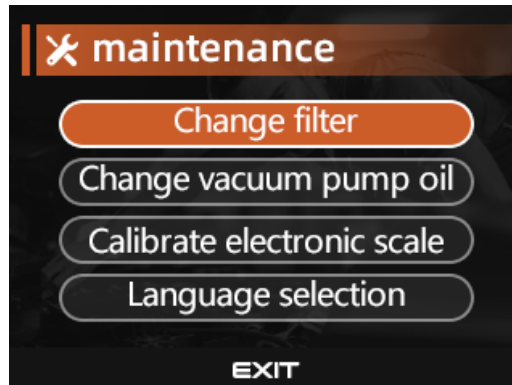

2. Replace the filter and the machine would reset the filter automatically. Replace Filter complete.





Company:

Location:

Contact:
+48

www.